

MENHIR collection

Design by
LUNDBERGDESIGN

MENHIR e MICRO MENHIR fanno parte di due famiglie con la medesima impronta elegante e pulita dal disegno lineare ma evocativo. Un gesto grafico molto efficace: una base cilindrica sostiene il diffusore che, all'accensione, riproduce la forma circolare del corpo sulla superficie dov'è installato. MENHIR è la versione dalle dimensioni maggiori, maggiormente adatta agli spazi pubblici, mentre MICRO MENHIR è perfetto per giardini e parchi privati. È disponibile in tre altezze e con distribuzione luminosa a 180° e 360°.

MENHIR and MICRO MENHIR belong to two families with the same elegant and clean impression from linear but evocative drawing. A very effective graphic gesture: a cylindrical base supports the diffuser that, when switched on, reproduces the circular shape of the body on the surface where it is installed. MENHIR is the version from the greater dimensions, more apt to public spaces, while MICRO MENHIR is perfect for private gardens and parks. It is available in three heights and with light distribution on 180° and 360°.





INFORMAZIONI TECNICHE

Corpo in lega di alluminio estruso verniciato e resistente alla corrosione. Testa di chiusura realizzata in pressofusione di alluminio verniciato e resistente alla corrosione. Protezione con trattamento di anodizzazione, fondo con polveri epossidiche e verniciatura poliester. Viti in acciaio inox A4.

TECHNICAL INFORMATION

Body made of extruded, corrosion resistant, aluminium alloy. Closing head made in corrosion resistant and painted die cast aluminium. Protection with anodizing treatment, epoxy powder base coating and polyester painting. A4 stainless steel screws.



**WHITE
COB LED
230V**




1 OPENING




2 OPENINGS



40 11 111
LED 3000K COB CRI>80
 10W / 900 lm LED data
11W / 230 lm Real data
 220-240V 50/60Hz **Surge protection included**
 A / A+ / A++
 Height 150 mm
 Cable length 1 m (2 x 1 mm²)




167
cd/klm




3000K
@350 mA

185 lux
145 lux
105 lux
65 lux
25 lux



167
cd/klm



3000K
@350 mA

185 lux
145 lux
105 lux
65 lux
25 lux

**WHITE
COB LED
230V**




1 OPENING




2 OPENINGS



40 11 211
LED 3000K COB CRI>80
 15W / 1350 lm LED data
15,5W / 350 lm Real data
 220-240V 50/60Hz **Surge protection included**
 A / A+ / A++
 Height 500 mm
 Cable length 1 m (2 x 1 mm²)




167
cd/klm




3000K
@350 mA

30 lux
22 lux
13 lux
7 lux
2 lux



167
cd/klm



3000K
@350 mA


30 lux
22 lux
13 lux
7 lux
2 lux

PRODUCT INFORMATION

IP65
 IK 08
 4 mm thick PMMA
 transparent diffuser
 IP68 connector included

AVAILABLE COLOURS
 .06 grey
 .08 anthracite
 Other colours on request

TECHNICAL DATA




PRODUCT INFORMATION

IP65
 IK 08
 4 mm thick PMMA
 transparent diffuser
 IP68 connector included

AVAILABLE COLOURS
 .06 grey
 .08 anthracite
 Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
 Available upon request without surcharge (for the code composition, please refer to page 9)


HELP YOU

LED
 LED COLOURS
 TEMPERATURE
 4000K

Other LED colours
 available on request

COLORS
FINISHES
 .01 black
 .02 white
 .07 corten
 .09 bronze

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)



FIXING
 page 341
 89 50 030 - Tie rod

INFO
 Ulteriori versioni sono
 disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu



More details at:
[platek.eu/
 MENHIR](http://platek.eu/MENHIR)




WHITE
COB LED
230V




40 11 311
LED 3000K COB CRI>80
 15W / 1350 lm LED data
15,5W / 350 lm Real data
 220-240V 50/60Hz **Surge protection included**
 A / A+ / A++
 Height 800 mm
 Cable length 1 m (2 x 1 mm²)


40 11 312
LED 3000K COB CRI>80
 15W / 1350 lm LED data
15,5W / 675 lm Real data
 220-240V 50/60Hz **Surge protection included**
 A / A+ / A++
 Height 800 mm
 Cable length 1 m (2 x 1 mm²)



167
cd/klm




167
cd/klm



3000K
@350 mA

35 lux
27 lux
19 lux
11 lux
3 lux



3000K
@350 mA

35 lux
27 lux
19 lux
11 lux
3 lux

PRODUCT INFORMATION

IP65
 IK 08
 4 mm thick PMMA
 transparent diffuser
 IP68 connector included

AVAILABLE COLOURS
 .06 grey
 .08 anthracite
 Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
 Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED
 LED COLOURS
 TEMPERATURE
 4000K

Other LED colours
 available on request

COLORS
FINISHES
 .01 black
 .02 white
 .07 corten
 .09 bronze

INFO
 Ulteriori versioni sono
 disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)

FIXING
 page 341
89 50 030 - Tie rod





More details at:
[platek.eu/
 MENHIR](http://platek.eu/MENHIR)



**WHITE
COB LED
230V**



40 32 611
LED 3000K COB CRI>80
 12W / 1740 lm LED data
15,3W / 610 lm Real data
 220-240V 50/60Hz ⊕
Surge protection included
 A / A+ / A++
 Height 200 mm



40 32 612
LED 3000K COB CRI>80
 12W / 1740 lm LED data
15,3W / 905 lm Real data
 220-240V 50/60Hz ⊕
Surge protection included
 A / A+ / A++
 Height 200 mm




PRODUCT INFORMATION

IP65
 IK 08
 5 mm thick PMMA
 transparent diffuser
 Cable input Ø 4,5÷10 mm

AVAILABLE COLOURS
 .06 grey
 .08 anthracite
 Other colours on request



TECHNICAL DATA





**WHITE
COB LED
230V**



40 52 611
LED 3000K COB CRI>80
 17W / 2400 lm LED data
20,3W / 820 lm Real data
 220-240V 50/60Hz ⊕
Surge protection included
 A / A+ / A++
 Height 620 mm
 Cable length 1 m (3 x 1 mm²)



40 52 612
LED 3000K COB CRI>80
 17W / 2400 lm LED data
20,3W / 1230 lm Real data
 220-240V 50/60Hz ⊕
Surge protection included
 A / A+ / A++
 Height 620 mm
 Cable length 1 m (3 x 1 mm²)




PRODUCT INFORMATION

IP65
 IK 08
 5 mm thick PMMA
 transparent diffuser
 IP68 connector included

AVAILABLE COLOURS
 .06 grey
 .08 anthracite
 Other colours on request

TECHNICAL DATA

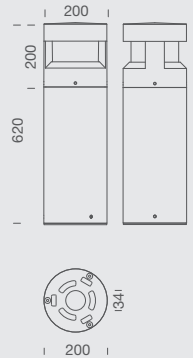

Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
 Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED
LED COLOURS
TEMPERATURE
 4000K
 Other LED colours
 available on request

COLORS
FINISHES
 .01 black
 .02 white
 .07 corten
 .09 bronze

INFO
 Ulteriori versioni sono
 disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)

FIXING
MENHIR 200
 page 341
 89 50 003 - Tie rod

FIXING
MENHIR 620
 page 341
 89 50 001 - Tie rod







More details at:
[platek.eu/
 MENHIR](http://platek.eu/MENHIR)

WHITE
COB LED
230V



40 82 611
LED 3000K COB CRI>80
37W / 4355 lm LED data
40,2W / 1650 lm Real data
220-240V 50/60Hz Ⓢ
Surge protection included
A / A+ / A++
Height 1050 mm
Cable length 1,5 m (3 x 1 mm²)

40 82 612
LED 3000K COB CRI>80
37W / 4355 lm LED data
40,2W / 2470 lm Real data
220-240V 50/60Hz Ⓢ
Surge protection included
A / A+ / A++
Height 1050 mm
Cable length 1,5 m (3 x 1 mm²)




PRODUCT INFORMATION

IP65
IK 08
5 mm thick PMMA
transparent diffuser
IP68 connector included

AVAILABLE COLOURS
■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED
LED COLOURS
TEMPERATURE
4000K

Other LED colours
available on request

COLORS FINISHES
■ .01 black
■ .02 white
■ .07 corten
■ .09 bronze

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)

FIXING
MENHIR 1050
page 341
89 50 001 - Tie rod

INFO
Ulteriori versioni sono
disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu



More details at:
[platek.eu/
MENHIR](http://platek.eu/MENHIR)