

# MONACO collection

Applique e pali di forma cilindrica: MONACO è una famiglia di apparecchi per luce funzionale, con un design di grande raffinatezza ed eleganza. Un cilindro che si applica a facciata e su palo. Le applique sono disponibili in versione a singola e doppia emissione: in questo modo, è garantita la perfetta illuminazione di qualunque punto della superficie, sia verso l'alto che verso il basso. MONACO è perfetto per i porticati e per i giardini e può essere normalmente installato fino a 4 metri d'altezza.

Wall lights and poles of cylindrical shape: MONACO is a family of fittings for functional lighting, with a design of great refinement and elegance. A cylinder that applies on the facade and on the pole. The wall lights are available in versions with single and double emission: in this way, the perfect illumination of any point of the surface is guaranteed, both upwards and downwards. MONACO is perfect for the arcades and for gardens and can normally be installed up to 4 meters in height.





## INFORMAZIONI TECNICHE

Corpo in lega di alluminio estruso verniciato e resistente alla corrosione. Flangia di chiusura in pressofusione di alluminio verniciato e resistente alla corrosione. Protezione con trattamento di anodizzazione, fondo con polveri epossidiche e verniciatura poliesteri. Viti in acciaio inox A4.

## TECHNICAL INFORMATION


Body made of extruded aluminium alloy, corrosion resistant. Die-cast aluminium closing flange, corrosion resistant. Protection with anodizing treatment, epoxy powder base coating and polyester painting. A4 stainless steel screws.



WHITE  
LED  
230V




**84 45 111**  
**LED 3000K CRI>80**  
6W / 950 lm Nominal data  
**6,9W / 660 lm Real data**  
220-240V 0/50/60Hz  
Double emission  
A / A+ / A++




1306  
cd/klm

Ø(m)	E <sub>max</sub>	E <sub>min</sub>	E(lx)
2	0,4	1276	813
4	0,8	319	203
6	1,2	142	90
8	1,6	80	51
10	2	51	33



**84 45 118**  
**LED 3000K CRI>80**  
6W / 950 lm Nominal data  
**6,9W / 590 lm Real data**  
220-240V 0/50/60Hz  
Double emission  
A / A+ / A++




1796  
cd/klm

Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E(lx)
1	0,8	674	375
2	1,6	168	94
3	2,4	75	42
4	3,2	42	23
5	4	27	15



**84 45 115**  
**LED 3000K CRI>80**  
6W / 950 lm Nominal data  
**6,9W / 560 lm Real data**  
220-240V 0/50/60Hz  
Double emission  
A / A+ / A++



1796  
cd/klm

Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E(lx)
2	0,4	1276	813
4	0,8	319	203
6	1,2	142	90
8	1,6	80	51
10	2	51	33


PRODUCT INFORMATION

IP65  
IK 07  
5 mm flat tempered  
extra clear glass

AVAILABLE COLOURS  
■ .06 grey  
Other colours on request

TECHNICAL DATA

187  
100



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)  
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED  
LED COLOURS  
TEMPERATURE  
4000K

Other LED colors  
available on request

COLORS SURFACE FINISH

- .01 black
- .02 white
- .07 corten
- .08 anthracite
- .09 bronze



INFO  
Ulteriori versioni sono  
disponibili consultando  
[www.platek.eu](http://www.platek.eu)

More versions are available on  
[www.platek.eu](http://www.platek.eu)



More details at:  
[platek.eu/](http://platek.eu/)  
MONACO


WHITE LED 230V



RGBW LED available on request




**84 42 411**  
**LED 3000K CRI>80**  
 19,5W / 1980 lm Nominal data  
**20,7W / 1360 lm Real data**  
 220-240V 50/60Hz  
 Single emission  
**Thermal LED protection**  
 A / A+ / A++



Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E <sub>(lx)</sub>
6	1	1111	737
12	2	278	184
18	3	123	82
24	4	69	46
30	5	44	29

**84 42 418**  
**LED 3000K CRI>80**  
 19,5W / 1980 lm Nominal data  
**20,7W / 1100 lm Real data**  
 220-240V 50/60Hz  
 Single emission  
**Thermal LED protection**  
 A / A+ / A++




Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E <sub>(lx)</sub>
2	1,6	808	473
4	3,2	202	118
6	4,8	90	53
8	6,4	51	30
10	8	32	19

PRODUCT INFORMATION


IP65  
 IK 10  
 12 mm flat tempered extra clear glass

AVAILABLE COLOURS  
 .06 grey  
 Other colours on request


TECHNICAL DATA

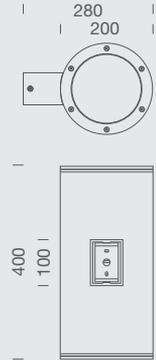

WHITE LED 230V




**84 43 411**  
**LED 3000K CRI>80**  
 39W / 3960 lm Nominal data  
**39,8W / 2720 lm Real data**  
 220-240V 50/60Hz  
 Double emission  
 A / A+ / A++




Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E <sub>(lx)</sub>
6	1	1111	737
12	2	278	184
18	3	123	82
24	4	69	46
30	5	44	29

**84 43 418**  
**LED 3000K CRI>80**  
 39W / 3960 lm Nominal data  
**39,8W / 2200 lm Real data**  
 220-240V 50/60Hz  
 Double emission  
 A / A+ / A++



Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E <sub>(lx)</sub>
2	1,6	808	473
4	3,2	202	118
6	4,8	90	53
8	6,4	51	30
10	8	32	19

**84 43 415**  
**LED 3000K CRI>80**  
 39W / 3960 lm Nominal data  
**39,8W / 1980 lm Real data**  
 220-240V 50/60Hz  
 Double emission  
 A / A+ / A++



Ø(m)	E <sub>max</sub>	E <sub>med</sub>	E <sub>(lx)</sub>
2	1,6	808	473
4	3,2	202	118
6	4,8	90	53
8	6,4	51	30
10	8	32	19

Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)  
 Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED LED COLOURS TEMPERATURE 4000K

Other LED colors available on request

COLORS SURFACE FINISH

- .01 black
- .02 white
- .07 corten
- .08 anthracite
- .09 bronze

ACCESSORI (per maggiori dettagli consultare pagina 321)  
 ACCESSORIES (for further details please refer to page 321)

FILTER page 338  
 89 18 650 - Ellipsoidal  
 89 18 655 - Sandblasted

INFO Ulteriori versioni sono disponibili consultando [www.platek.eu](http://www.platek.eu)

More versions are available on [www.platek.eu](http://www.platek.eu)




More details at: [platek.eu/MONACO](http://platek.eu/MONACO)


WHITE  
LED  
230V



**87 55 719**  
**LED 3000K CRI>80**  
 30W / 4320 lm Nominal data  
**35,9W / 3250 lm Real data**  
 220-240V 0/50/60Hz  
 A / A+ / A++



493  
cd/klm

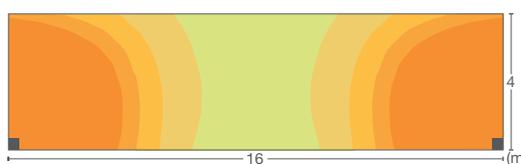

30W LED 4000K  
 H. 4m  
 Distance 16m  
 Large 4m  
 Em = 34 lux  
 33 lux  
 26 lux  
 19 lux  
 12 lux  
 9 lux

PRODUCT INFORMATION

IP65  
 IK 010  
 12 mm flat tempered  
 extra clear glass

AVAILABLE COLOURS

.06 grey  
 Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)  
 Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED  
 LED COLOURS  
 TEMPERATURE  
 4000K

Other LED colors  
 available on request

COLORS SURFACE FINISH  
 .01 black  
 .02 white  
 .07 corten  
 .08 anthracite  
 .09 bronze

ACCESSORI (per maggiori dettagli consultare pagina 321)  
 ACCESSORIES (for further details please refer to page 321)

POLES  
 page 342  
 86 23 061 - H. 4 m  
 for 1 luminaire  
 86 23 062 - H. 4 m  
 for 2 luminaire

INFO  
 Ulteriori versioni sono  
 disponibili consultando  
 www.platek.eu

More versions are available on  
 www.platek.eu



More details at:  
 platek.eu/  
 MONACO