

sieve table
+/- 33,5 kg

cooking table
+/- 38,5 kg



This item is TÜV certified.

User manual art. GP56
“Kitchenette Sandy”
(version 2019-10-14)

Latest version is located at www.govaplast.com

Mounting

The equipment is delivered fully assembled and requires no extra mounting.

Material

- Solid posts made of recycled plastics (PE) coloured throughout (beige, grey)
- Stainless steel screws (6 and 8 mm)
- Black PE sheets thickness 18 mm

Maintenance

The kitchenette contains no moving parts. The plastic material requires very little maintenance, that is cleaning with soapy water and a sponge or soft brush and rinsing with water to remove dirt and soap. As the materials' water absorption is less than 0.29%, it will not get stained by oil, grease or other products. Moss and algae will not adhere easily and can easily be removed. Cleaning with high-pressure (max. 100 bar) is possible but not recommended and mostly even not necessary. Spray with a fan-shaped jet with minimum 30 cm distance from the surface. Painting or staining is useless as the material does not need extra protection and moreover the paint will not stick to the plastic.

Use

It is not intended that the children stand on/in the kitchenette.

Inspection Requirements

Visual inspection:

Weekly or monthly, depending on the intensity of use.

Functional inspection:

Monthly or four-monthly, depending on the intensity of use.

Detailed inspection:

Yearly

Special attention during functional or detailed inspection:

- Check all parts are tight.
- Check worn, loose, damaged, missing parts.
- Check screws sticking out.
- Check anchoring
- Vandalism?

Use original Govaplast parts when repairing is required, to ensure the TÜV certificate remains valid.

Installation

The equipment is delivered fully assembled. It is anchored in the sand 40 cm deep until the level mark. Stabilised sand can be used to anchor the equipment firmly and to avoid that children dig it out.

No fall absorption surface required

The equipment's fall height is less than 60 cm. Therefore it's allowed to install on a hard surface. However, the equipment is designed to be placed in a sandpit.


Anchoring

The legs of both tables are dug into the ground until the level mark on one of the legs.



Security Zone

An obstacle-free area of minimum 150 cm around the 2-parts equipment is required.

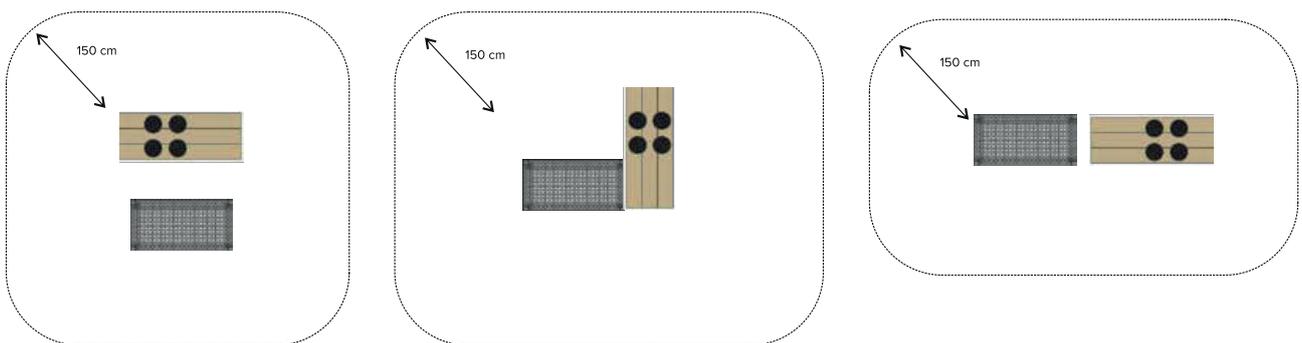

Specifications

